






Bravo 70

Electrical submersible slurry pump

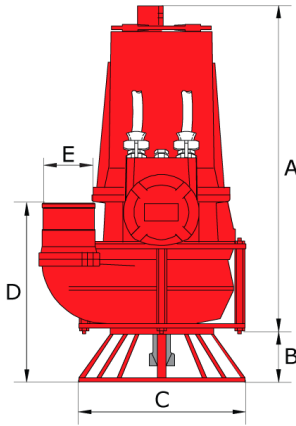

60 Hz	Bravo 70
Discharge connection E	6"
Rated power P_2 [kW/HP]	55 / 73.7
Max. power consumption P_1 [kW]	62.5
Shaft speed [r.p.m.]	1750
Rated current at 230V	180.9 A
Rated current at 460V	86.1 A
Rated current at 575V	68.9 A
Solids passage with / without agitator	2" / 4"
Dimensions A / B / C / D	1025 / 150 / 470 / 520 mm
Dimensions A / B / C / D	40½ / 6 / 18½ / 20½"
Weight [kg/lbs]	475 / 1055

Other voltages on request

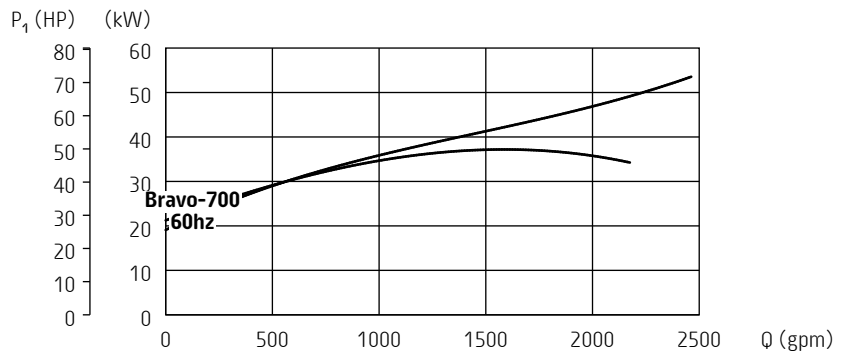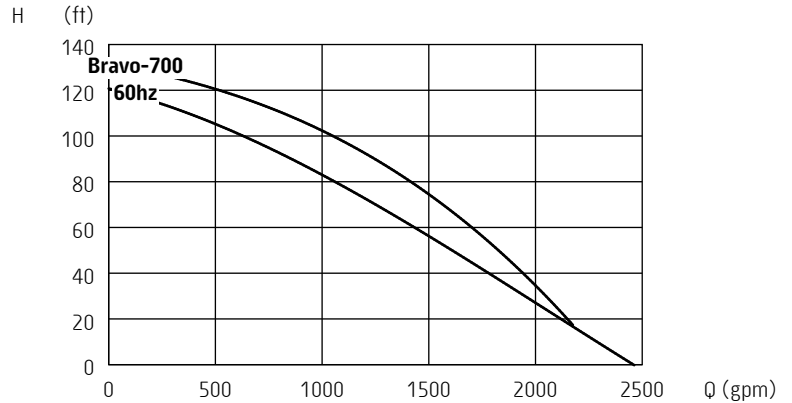

ISO 9906/A

General description

Vortex impeller pump with agitator in wear resistant NiHard 4 for reliable transport of highly abrasive solids in high concentrations. For industry, mining, construction works, dredging and other demanding applications

Classification

Electrical submersible slurry pump
Protection class: IP 68

Electrical motor

Squirrel cage induction motor
Insulation class: H (IEC 85)

Motor protection

Thermoswitches in motor windings

This pump must be used with external motor protection in accordance with technical data

Cable - SubCab 20 m (66 ft)

50 Hz 400V YD: 2x4x16mm² + 1x4x2.5mm²
50 Hz 500V YD : 2x4x10mm² + 1x4x2.5mm²
60 Hz 380 - 460V DOL: 2xAWG6/4 + 1xAWG14/4
60 Hz 575V DOL: 2xAWG2/4 + 1xAWG14/4

Shaft seals

Double mechanical shaft seals running in an oil compartment
Material lower seal: silicon carbide - silicon carbide
Material upper seal: carbon - ceramic

Materials

Motor housing: *Cast iron*
Wear plate: *NiHard 4*
Pump housing: *NiHard 4*
Flange discharge connection: *NiHard 4*
Hose or Iso-G BSP adapter: *Cast iron*
Impeller: *NiHard 4*
Agitator: *NiHard 4*
Shaft: *Stainless steel*
Bolts: *Stainless steel*
Electrical cable: *Neoprene*
Primer: *Alkyd primer*
Top coating: *Two component high-build polyurethane coating*

Limitations

Max. submersion depth: 20 m (66 ft)
Max. liquid temperature: 40 °C (104 °F)
Allowed pH range: 4 - 10