




Major

Electrical submersible drainage pump

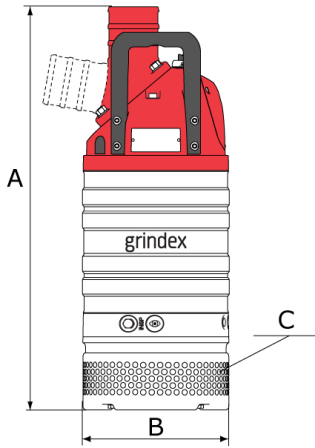

60 Hz	N	H
Discharge connection C	4"	3"
Rated power P ₂ [kW/HP]	6.6 / 8.9	6.6 / 8.9
Max. power consumption P ₁ [kW]	7.7	7.7
Shaft speed [r.p.m.]	3500	3500
Rated current at 230V	22 A	22 A
Rated current at 460V	11 A	11 A
Rated current at 575V	8.5 A	8.5 A
Solids passage C	10 mm / 0.4"	10 mm / 0.4"
Dimensions A / B	793 / 286 mm	793 / 286 mm
Dimensions A / B	31¼" / 11¼"	31¼" / 11¼"
Weight [kg/lbs]	54 / 119	54 / 119

Other voltages on request

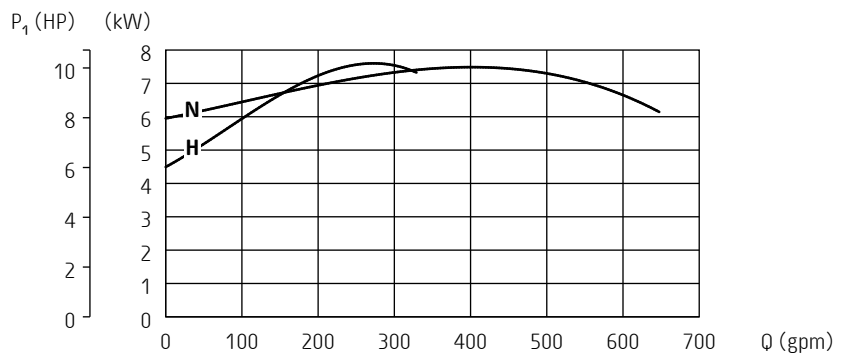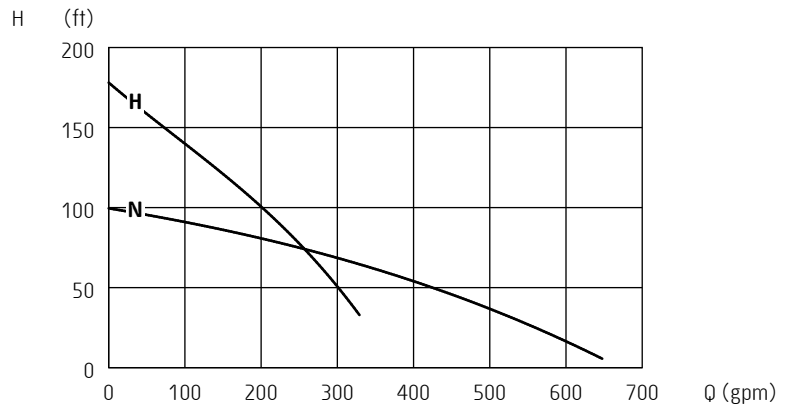

ISO 9906/A

Pump types

N: normal pressure
H: high pressure

Classification

Electrical submersible drainage pump
Protection class: IP 68

Electrical motor

Squirrel cage induction motor, insulation class: H (IEC 85)

Motor protection

Phase sequence control, phase failure guard, temperature guard with thermal contacts in the stator opening temperature 140°C (284°F) (= SMART system), air valve

Cable - SubCab

4G2,5mm², length 20 m or 14AWG/4, length 53 ft

Limitations

Max. submersion depth: 20 m (66 ft)
Max. liquid temperature: 40 °C (104 °F)
Allowed pH range: 5 - 8
Maximum liquid density: 1100 kg/m³ (68 lbs/ft³)

Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment

Material lower seal: tungsten carbide - tungsten carbide
Material upper seal: tungsten carbide - tungsten carbide

Bearings

Ball bearings with C3 clearance

Discharge connection

3-4" hose, ISO-G or NPT

Materials

Casted parts: Aluminium
Outer casing: Stainless steel
Motor shaft: Stainless steel
Impeller and suction cover: Hard-Iron™
Diffusers: Nitrile rubber
Screws and nuts: Stainless steel
O-rings: Nitrile rubber

Accessories

Level regulator (max 400 V)
Zinc anodes
Low suction collar
Tandem connection
Pump raft