





Mini

Electrical submersible drainage pump



60 Hz	Mini
Discharge connection	2"
Rated power P_2 [kW/HP]	0.82 / 1.1
Max. power consumption P_1 [kW]	1.1
Shaft speed [r.p.m.]	3400
Rated current at 115V	9.8 A
Rated current at 230V	4.8 A
Solids passage [mm/inch]	11x5 / 0.4x0.2
Height [mm/inch]	440 / 17¼
Diameter [mm/inch]	185 / 7¼
Weight [kg/lbs]	14.5 / 32

Other voltages on request

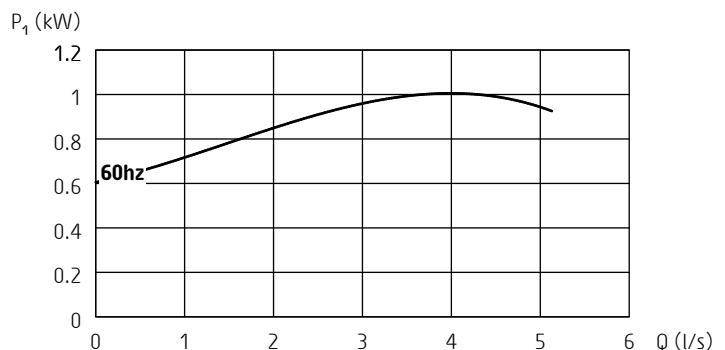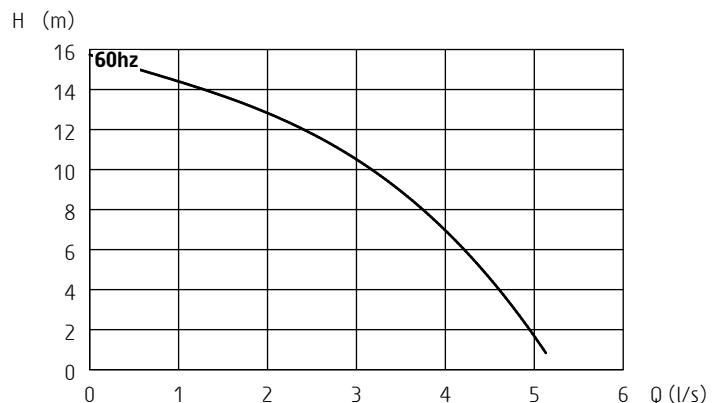

ISO 9906/A

Pump types

Single phase

Classification

Electrical submersible drainage pump

Protection class: IP 68

Electrical motor

1-phase: Squirrel cage induction motor

50 Hz: separate start and run capacitor

60 Hz: combined start and run capacitor

Insulation class: F (IEC 85)

Motor protection

1-phase: Temperature guard with a thermal contact in stator opening temperature 135°C (275°F)

Cable

1-phase: 3G1mm², 10 m (33 ft) / 16AWG/3, 50 ft

Limitations

Max. submersion depth: 10 m (32.8 ft)

Max. liquid temperature: 40 °C (104 °F)

Allowed pH range: 5 - 8

Maximum liquid density: 1100 kg/m³ (68 lbs/ft³)

Shaft seals

Double mechanical seals running in an oil compartment

Material lower seal: *silicon carbide - silicon carbide*

Material upper seal: *carbon - aluminum oxide*

Bearings

Ball bearings with C3-clearance

Discharge connection

2" hose, BSP or NPSM

Materials

Pump top: *Aluminium*

Outer casing: *Aluminium*

Stator housing: *Aluminium*

Motor shaft: *Stainless steel*

Impeller: *Polyurethane*

Diffuser: *Polyurethane*

Screws and nuts: *Stainless steel*

Accessories

Float switch

Low suction collar

Pump raft

Specifications can be changed without notice